

Hot-melt adhesive gun Changing the hook nozzle

Instruction manual



Always wear heat-protective gloves when carrying out the work steps described below!

Tools required




Spanner


- 1 Heat up the device!
- 2 Disconnect the unit from the mains by pulling the mains plug.



- 3 Unscrew the defective hook nozzle over a suitable surface. Do not operate the trigger under any circumstances to avoid uncontrolled adhesive leakage.

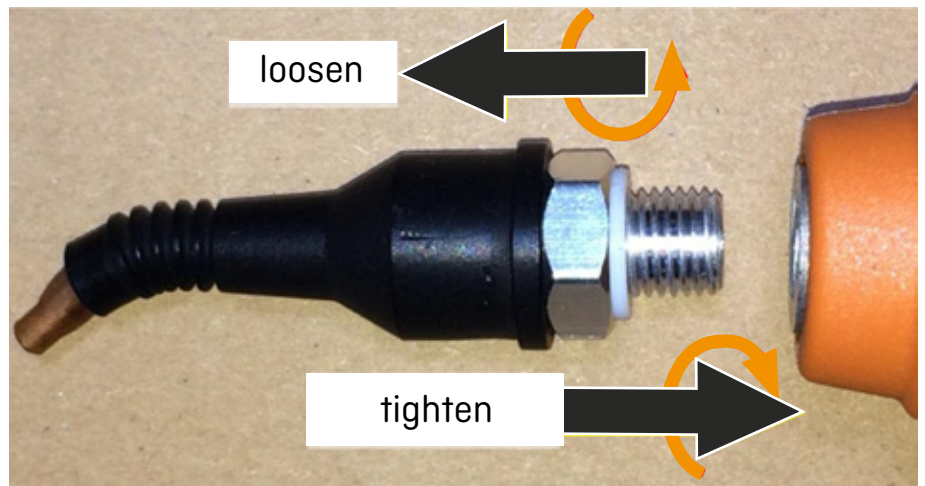

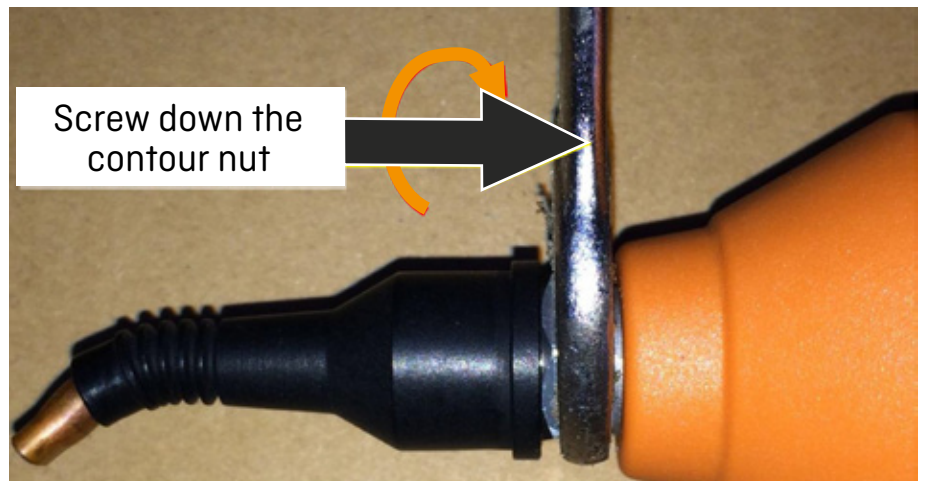


- 4 Screw on the new hook nozzle hand-tight. The device can then be put back into operation immediately.



Caution

The hook nozzle is designed for gluing the back of the skirting boards.

Protect from impacts and bending!

Döllken Profiles GmbH
Industriestraße 1
59199 Bönen
Follow us on   

T: +49 3643 4170 711
F: +49 3643 4170 330
info@doellken-profiles.com
www.doellken-profiles.com